

## Vulkollanräder


**Rad:** Radkörper aus Aluminium-Vollradkörper mit Vulkollanbelag (Desmodur 15) in 92° Shore A Härte, Kugellagerung.

FL = flach  
BA = ballig

## Vulkollan wheels

**Wheel:** Wheel centre out of aluminium-full-core, equipped with vulkollane tyre (Desmodur 15), hardness 92° Shore A, ball bearing.

FL = flat tread  
BA = round tread

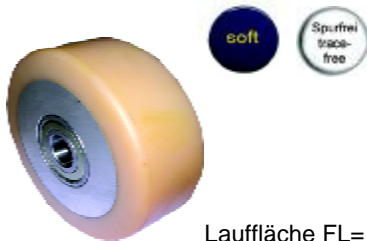

Lauffläche FL= flach / FL= flat tread



Lauffläche BA = ballig / BA = round tread

Räder Wheels						
Code:	mm	mm	mm	mm	Kg	
W69/3/50/1/FL	50	40	10	40	100	HHHHHHHH
W69/3/65/FL	65	30	12	30	150	HHHHHHHH
W69/3/80/1/FL	80	30	12	30	200	HHHHHHHH
W69/3/80/2/FL	80	40	12	40	250	HHHHHHHH
W69/3/100/12/FL	100	40	12	40	350	HHHHHHHH
W69/3/125/1/20/FL	125	45	20	45	450	HHHHHHHH
W69/3/150/20/FL	150	50	20	50	600	HHHHHHHH
W69/3/175/20/FL	175	50	20	50	650	HHHHHHHH
W69/3/180/20/FL	180	50	20	50	700	HHHHHHHH
W69/3/200/20/FL	200	50	20	50	800	HHHHHHHH


Räder Wheels						
Code:	mm	mm	mm	mm	Kg	
W69/3/65/BA	65	30	12	30	150	HHHHHHHH
W69/3/80/1/BA	80	30	12	30	200	HHHHHHHH
W69/3/80/2/BA	80	40	12	40	250	HHHHHHHH
W69/3/90/12/BA	90	40	12	40	350	HHHHHHHH
W69/3/100/12/BA	100	40	12	40	350	HHHHHHHH
W69/3/125/1/20/BA	125	45	20	45	450	HHHHHHHH
W69/3/150/20/BA	150	50	20	50	600	HHHHHHHH
W69/3/175/20/BA	175	50	20	50	650	HHHHHHHH
W69/3/180/20/BA	180	50	20	50	700	HHHHHHHH
W69/3/200/20/BA	200	50	20	50	800	HHHHHHHH

## Schwerlast-Polyurethanrollen

Rad: ø 100mm

## Heavy duty polyurethan castors

Wheel: ø 100mm

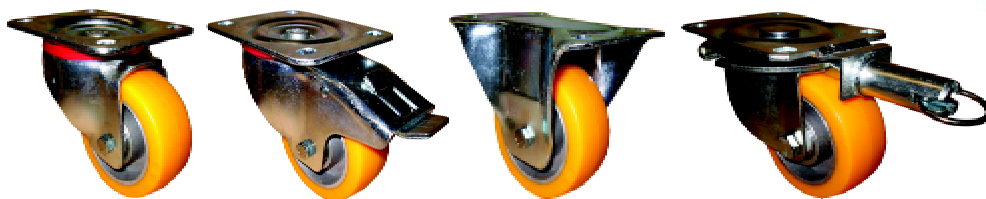

Lenkrolle Swivel castors	Lenkrolle Stop Swivel castors lock	Bockrolle Fixed castors	Lenkrolle Richtungsfeststeller Swivel castors with directional lock
Code:	Code:	Code:	Code:
W6941/3/100/PU/BAL	W6941/F/3/100/PU/BAL	W6939/3/100/PU/BAL	W6941/R/3/100/PU/BAL

mm	mm	mm	mm	mm	mm	mm	mm	Kg	
100	40	125	48	135x110	105x80	10,5	280	HHHHHHHH	

Härte ca. 95 Shore A° / hardness abt. 95 Shore A°



Weitere Hamburger Theaterrollen Ausführungen auf Seite 37  
Hamburger theatre castors other versions go to page 37